

Mul T Lock

E-Series Closed Shackle Padlocks



Established
1977

- ★ Locks
- ★ Safes
- ★ Keys
- ★ Grilles
- ★ Shutters
- ★ Padlocks
- ★ Digital locks
- ★ Card access
- ★ Locksmiths
- ★ Barriers
- ★ Bollards
- ★ Fitting service
- ★ Mon - Fri

Application

Patented high security padlock, for general use with Mul-T-Lock® high security padbars.

Operation

The shackle is locked by a double ball bearing mechanism. Unlocking with 90° key rotation.

Options

Available with high (protected) or low upper body. Black electrophoretic finish. Retained shackle.

Materials

Body: Case Hardened Steel.
Shackle: Hardened Boron Alloy Steel.

Additional Features

Rotating disk or anti-drilling pins (E-8) in the cylinder provide drilling resistance. Protective shutter prevents dust contamination. Drainage holes prevent freezing.

Cylinder Mechanism

Mul-T-Lock® unique high precision 10 telescopic pin tumbler system. Pick and drill resistant for high security needs.

Keys

Reversible Nickel Silver key with plastic key head and coloured insert for identification. Also available in all-Nickel Silver.

Key Security


Orders for keys marked "do not duplicate" should only be made upon presentation of a key card.

Cylinder Options

Interactive® (patented).
'3 IN 1' (Changeable combination).
Keyed different, Keyed alike,
Master keyed.

Standards

Applicable "CEN", "ASTM".

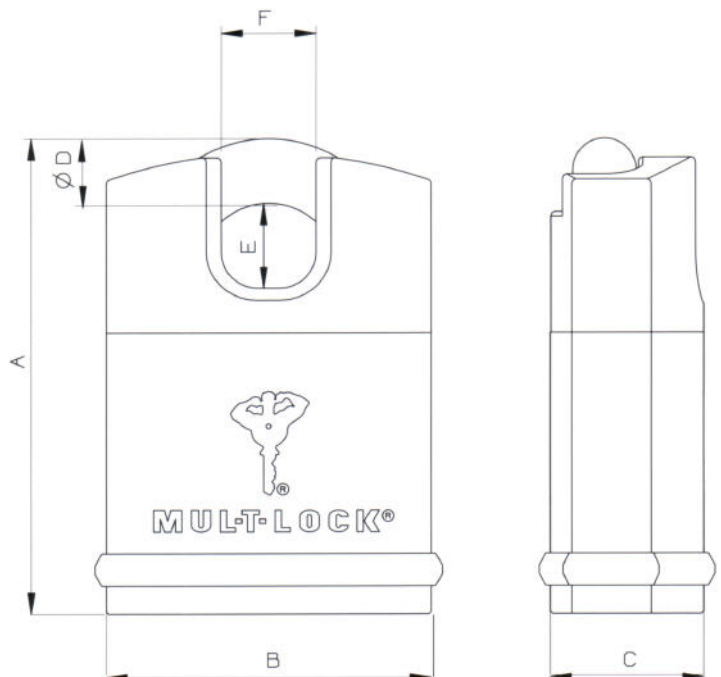

Model	Body			Shackle			Standard Grades*		Suitable Padbar	
		A	B	C	D	E	F	"CEN"		"ASTM"
E8-H	mm	84	52	33	8	15	16	4	6	PB-8
	Inch	3.228	2.047	1.229	0.314	0.551	0.629			
E11-H	mm	95	62	34	11	16	17	5	6	PB-11
	Inch	3.700	2.440	1.338	0.433	0.629	0.669			
E14-H	mm	107	72	34	14	19	21	6	6	PB-14
	Inch	4.094	2.834	1.338	0.551	0.748	0.826			
E18-H	mm	122	84	40	18	24	25	6+	6	PB-14
	Inch	4.606	3.307	1.574	0.708	0.944	0.984			

*Applicable to "ASTM", "CEN" grade standard.

The security padlock we can provide:

- ★ in sets on the same key
- ★ under a master key suite
- ★ suited with other types MTL *Interactive* cylinders

Benn
LOCK AND SAFE

13 St David's Square
Peterborough PE1 5QA

TEL: 01733 552728
FAX: 01733 551439

E: enquire@bennlockandsafe.co.uk
www.bennlockandsafe.co.uk